

# Mortice Latch

## Heavy-duty 72mm Euro Profile Lockcases

For use in high frequency areas by public or others with little incentive to exercise care, with a high chance of misuse.

- › European DIN style casing with 60mm backset
- › Heavily sprung latch follower for heavy unsprung door furniture (up to 930g pair)
- › Positive 1° follower angle
- › Durable latch follower technology successfully cycle tested to 3.5mil operations
- › Quick reversible latch allows easy onsite handing
- › Spindle grip feature and adjustable strike to reduce door rattle
- › Two piece forend provides clean aesthetics and easy maintenance
- › Splinter guard provides a professional installation



### Specification

|                        |   |
|------------------------|---|
| Latch from the inside  | Latch bolt withdrawn by lever handle              |
| Latch from the outside | Latch bolt withdrawn by lever handle              |
| Furniture              | Sprung or unsprung                                |
| Angle of lever         | 35°   |
| Cylinders              | N/A   |
| Fixings                | 38mm centre bolt                                  |
| Handing                | Reversible (Left/Right)                           |
| Backset                | 60mm  |
| Follower               | 8mm   |
| Lockcase depth         | 90mm  |
| Height                 | 165mm   |
| Lockcase thickness     | 16mm  |
| Centre distance        | N/A   |
| Inner forend           | Radius  |
| Outer forend/Strike    | Radius  |
| Forend size            | 235mm (L) x 24mm (W)                              |
| Deadbolt throw         | N/A   |
| Latch material         | Steel chrome plated                               |
| Case material          | Heavy duty mild steel enclosed case Silver finish |
| Faceplate & Strike     | Grade 304 Satin Stainless Steel                   |
| Splinter box           | Black plastic                                     |

### Finishes


Matching satin stainless steel forend and strike as standard. Product can also be supplied in:

|                   |    |
|-------------------|----|
| › Polished chrome | CH |
| › Polished brass  | PB |
| › Satin brass     | SB |
| › Antique brass   | AB |

### Fire rating

30 and 60 minute fire rated doors require an additional intumescent pack to be fitted:

|                         |                      |
|-------------------------|----------------------|
| <b>Mortice Latch</b>    | <b>SEL-PRT-00633</b> |
| <b>Intumescent Pack</b> | <b>SEL-PRT-01273</b> |

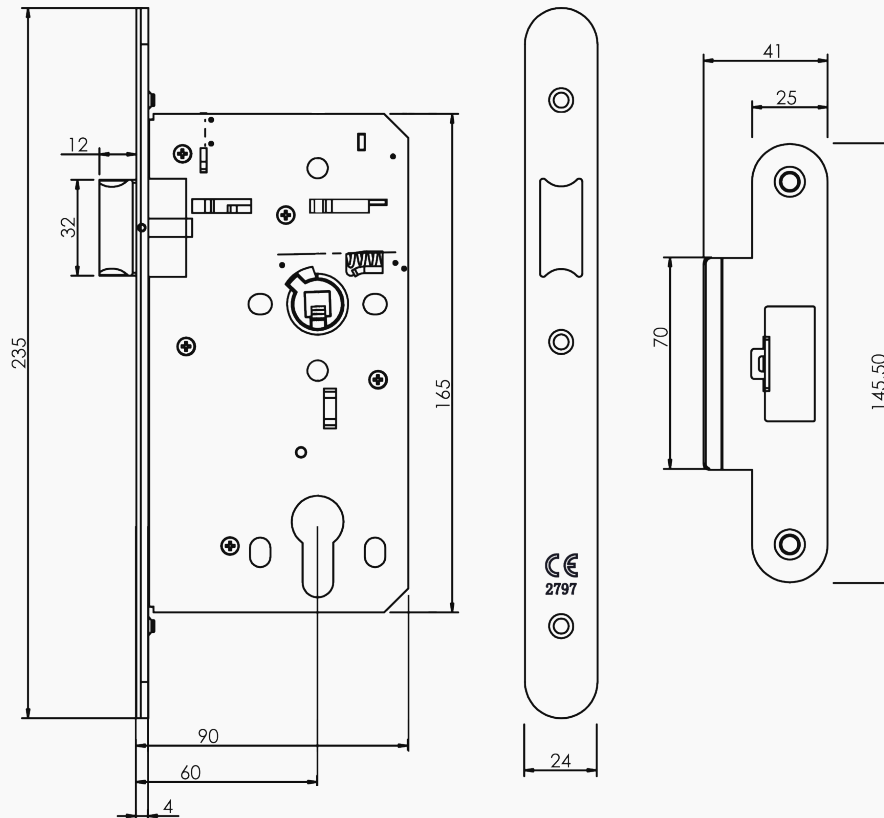

Not to scale

## Standards

Tested to BS EN12209

CE Marked and fully tested to EN 12209 2003

Grade 3 Category of use

High frequency of use by public or others (i.e. members of the public, students and employees etc.) with little incentive to exercise care

CE Marked, Suitable for use on Fire Doors

- › Tested to EN 1634-1 2014 on 30 and 60 minute timber fire doors and 240 minute metal fire doors
- › For 30 and 60 min fire doors use 1mm interdens behind the strike plate and 2mm interdens around the lockcase

› Certifire Approved

CF5543

› BS EN 12209 Classification

3X810G-B020

› BS EN 12209 CE Cert No

0086-CPR-658466

15 Year Guarantee

The performance of the HD72 is supported by a 15 year guarantee.

Equality Act

The dimensions of the lock case assist in fulfilling requirements and duties required under the Equality Act by satisfying the recommendations of BS 8300 2009 and Approved Document M 2015 (2016) Intumescent kit JHD72-IK suitable for 30 and 60 minute timber fire doors are available to order as a separate item.



**selo**<sup>®</sup>

call 020 3880 0339  
email [sales@selo-uk.com](mailto:sales@selo-uk.com)  
www.[selo.global](http://selo.global)

Selo  
K2 Kents Hill Business Park Timbold Drive  
Milton Keynes MK7 6BZ

Follow us on:

