

Mortice Deadlock

Heavy-duty 72mm Euro Profile Lockcases

For use in high frequency areas by public or others with little incentive to exercise care, with a high chance of misuse.

- › European DIN style casing with 72mm centres and 60mm backset which are designed for use with Europrofile cylinders
- › 20mm Single throw deadbolt for ease of operation
- › Two piece forend provides clean aesthetics and easy maintenance
- › Splinter guard provides a professional installation



Specification

Deadlock from inside	Locked/unlocked by the cylinder key/cylinder turn
Deadlock from outside	Locked and unlocked by operation of the cylinder
Furniture	N/A
Angle of lever	N/A
Cylinders (Euro)	Single/Double/Thumbturn
Fixings	Bolt-through door furniture with 38mm centres
Handing	N/A
Backset	60mm
Follower	N/A
Lockcase depth	90mm
Height	165mm
Lockcase thickness	16mm
Centre distance	N/A
Inner forend	Radius
Outer forend/Strike	Radius
Forend size	235mm (L) x 24mm (W)
Deadbolt throw	20mm single throw
Deadbolt material	Steel chrome plated
Case material	Heavy duty mild steel enclosed case Silver finish
Faceplate & Strike	Grade 304 Satin Stainless Steel
Splinter box	Black plastic

Finishes


Matching satin stainless steel forend and strike as standard. Product can also be supplied in:

- › Polished chrome CH
- › Polished brass PB
- › Satin brass SB
- › Antique brass AB

Fire rating

30 and 60 minute fire rated doors require an additional intumescent pack to be fitted:

Mortice Deadlock	SEL-PRT-00655
Intumescent Pack	SEL-PRT-01273

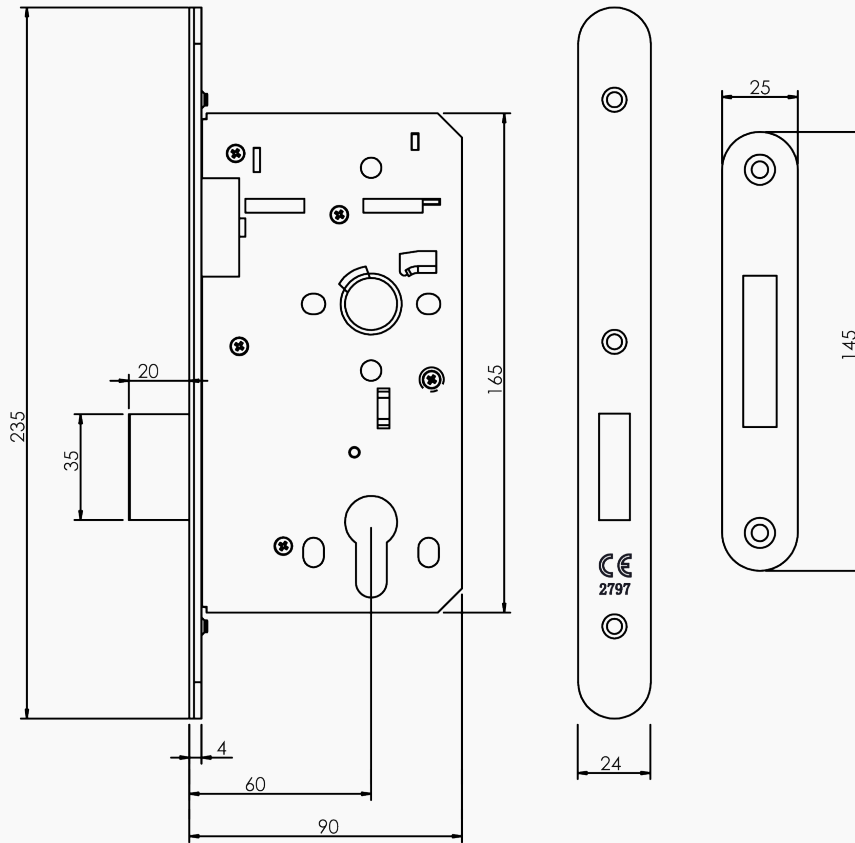

Not to scale

Standards

Tested to BS EN12209

CE Marked and fully tested to EN 12209 2003

Grade 3 Category of use

High frequency of use by public or others (i.e. members of the public, students and employees etc.) with little incentive to exercise care

CE Marked, Suitable for use on Fire Doors

- › Tested to EN 1634-1 2014 on 30 and 60 minute timber fire doors and 240 minute metal fire doors
- › For 30 and 60 min fire doors use 1mm interdens behind the strike plate and 2mm interdens around the lockcase

› Certifire Approved

CF5543

› BS EN 12209 Classification

3X810G3-BA00

› BS EN 12209 CE Cert No

0086-CPR-658458

15 Year Guarantee

The performance of the HD72 is supported by a 15 year guarantee.

Equality Act

The dimensions of the lock case assist in fulfilling requirements and duties required under the Equality Act by satisfying the recommendations of BS 8300 2009 and Approved Document M 2015 (2016) Intumescent kit JHD72-IK suitable for 30 and 60 minute timber fire doors are available to order as a separate item.

