

selo®

Concealed Frame Doorsets
Riser Doors & AOVs



Bi-directionally
Fire Tested

Via
Access Panels

Discreet design
Effective operation



Sustainably
sourced



Fire-rated
FD120



Acoustic
reduction



Air tight
Class 4

Interactive product guide



An introduction to Via

Via Access Panels provide discreet yet functional concealment for valves, plumbing, stop-taps, switches and more.

Overview

Naturally creating services cupboards within cavities and recesses, the access panels offer a lockable door that is powder-coated and can be painted to match with the surrounding decor.

Constructed in robust 1.2mm thick Zintec steel, the Via access panels are fitted with either pin hinges or a continuous piano hinge. The T-key lock is concealed by a white plastic collar and plug, with the option of touch latch to completely conceal all locks.



Beaded frame

To be plastered or taped and jointed with surrounding finish.



Picture frame

Solid flange sits on surface of the adjoining wall or ceiling.

Via benefits



Robust

Robust construction for demanding use.



Simple

Streamlined design - no wall reinforcement.



Pre-primed

Powder-coated door enables over-painting.



Fire rated

Available fire-rated to BN and EN standards.

Preparation and fitting

Via Access panels are easy to fit. A clear opening must be cut in the structure, 10mm larger than the panel ordered. The panel is then offered up and fixed back using 38mm screws through the pre-punched holes to all four sides of the frame.

Wherever possible, fitting should take place with the door in place.

Sizes

Via is manufactured to your specifications at the size required. Common sizes are:

300 x 300mm	450 x 450mm
600 x 600mm	900 x 900mm
900 x 600mm	1200 x 600mm

Maximum fire rated size is: 900 x 2300mm

Via Basic

- › Metal faced
- › NFR
- › Wall / Ceiling

Via Plasterboard faced

- › NFR
- › FD60
- › FD120
- › Wall / Ceiling

Via Premier

- › Metal Faced
- › NFR
- › FD60
- › FD120
- › Acoustic
- › Air tight
- › Wall / Ceiling
- › Tiled walls
- › Circular (NFR only)


Via Premier System overview

1 Lock

2 Intumescent seal

3 Plastic lock cover

4 25mm Picture/Beaded frame

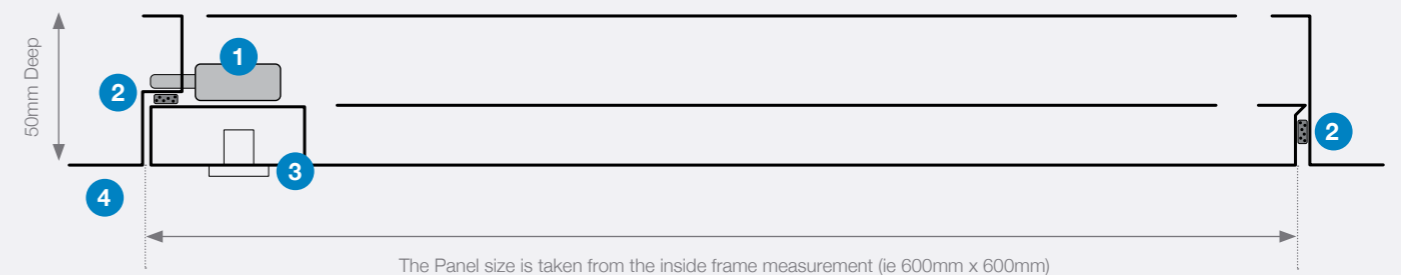

Let's talk about your project

Contact us today to speak to one of our experienced project leaders.

call 020 3880 0339 / **email** sales@selo-uk.com

Visit our website to view our complete range of Concealed Doorsets, Access Panels and AOVs.

www.selo-uk.com



call 020 3880 0339
email sales@selo-uk.com
www.selo-uk.com

Selo
K2 Kents Hill Business Park Timbold Drive
Milton Keynes MK7 6BZ

Follow us on:

